

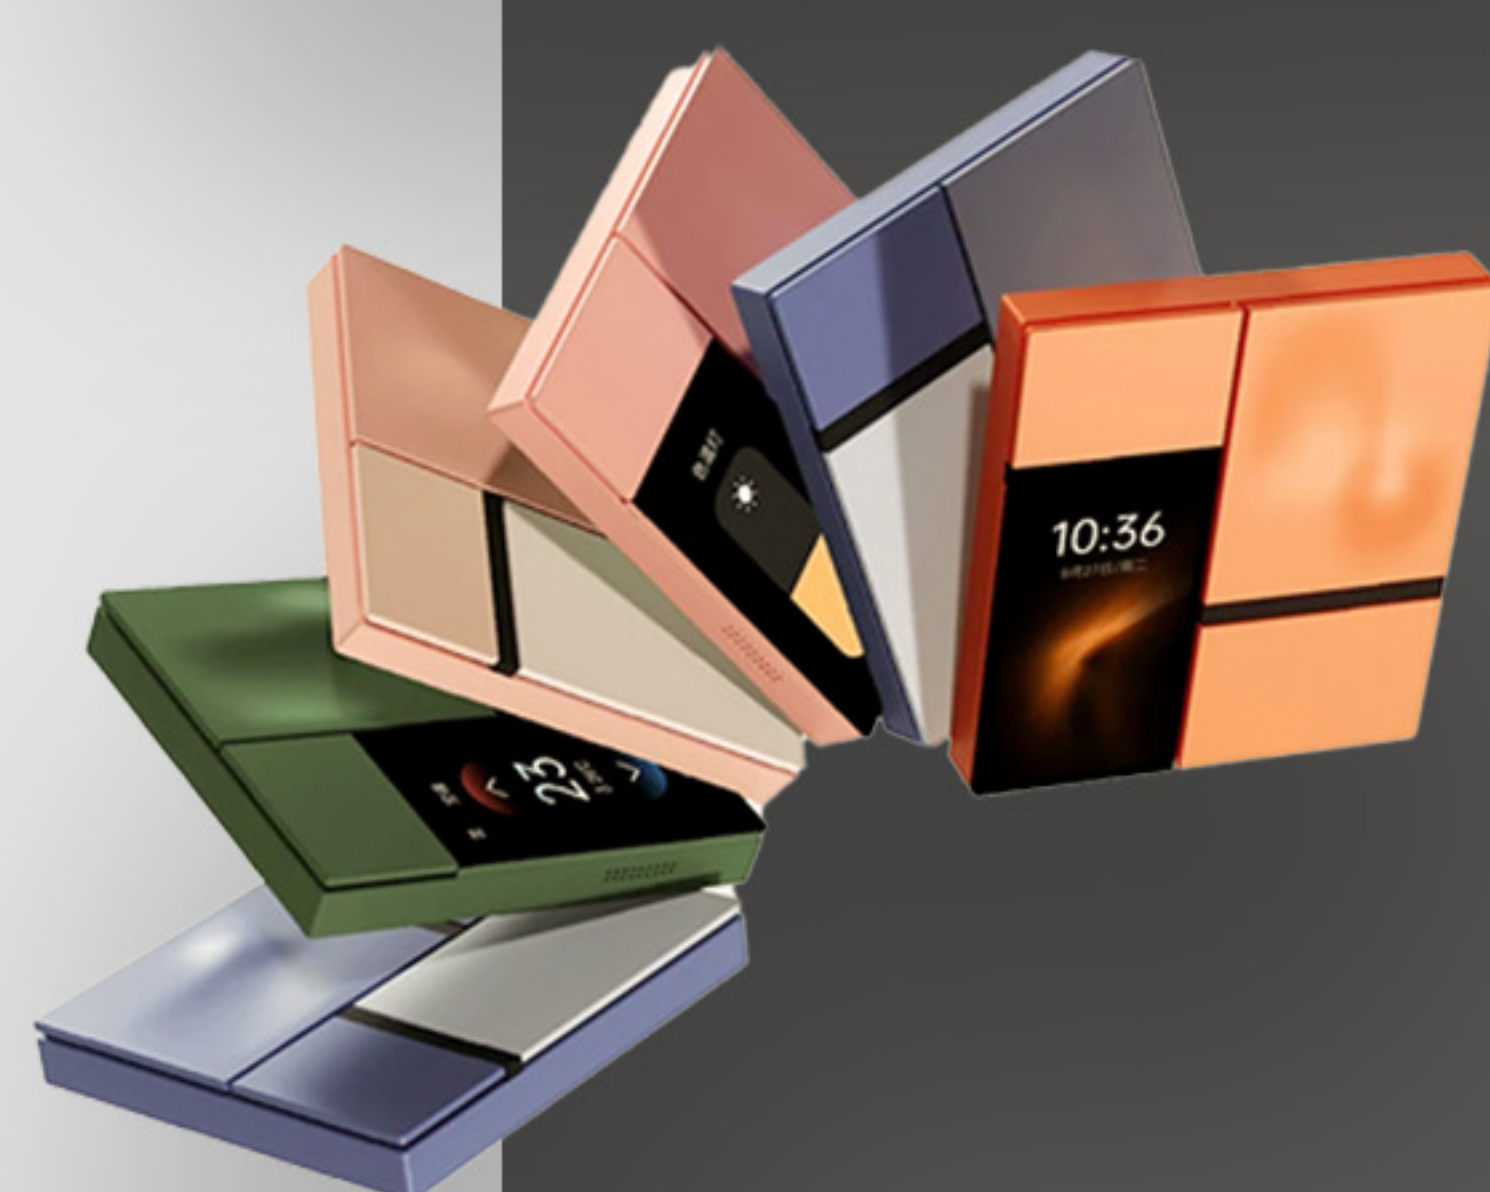


ORVIBO




Price list


2024

خانه هوشمند نامبروان
WWW.No1Smarthome.ir

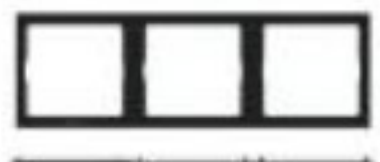




S. N.	Model no.	Item Name	Specifications	Picture	price (USD)
Smart Hub/Gateway/Super Control Panel					
1	VS20ZW	Zigbee Minihub	Size:88*90*27mm Color:White Housing Material:PC Power Supply:DC5V, 1A, micro USB Working temp.:0~40°C		60
2	V20X	MixPad S Grey	Power Supply:AC100-220V 50/60Hz Communication Protocol:ZigBee HA Working Frequency :2.4G Supports Devices:200 pcs Working hum.:≤85% RH Body Size:85*170*38mm Housing Material:PC + ABS Body Color:White + Grey		360
3	V20XW	MixPad S White	Power Supply:AC100-220V 50/60Hz Communication Protocol:ZigBee HA Working Frequency :2.4G Supports Devices:200 pcs Working hum.:≤85% RH Body Size:85*170*38mm Housing Material:PC + ABS Body Color:White + Grey		370
4	V20XG	MixPad S Gold	Power Supply:AC100-220V 50/60Hz Communication Protocol:ZigBee HA Working Frequency :2.4G Supports Devices:200 pcs Working hum.:≤85% RH Body Size:85*170*38mm Housing Material:PC + ABS Body Color:White + Grey		370
5	V36X	Mixpad C2 black L&N connection	Power Supply: AC100-240V, 50/60Hz L&N connection Color: Black Size: 86*86*35.8cm Built-in switch: 2 gang Maximum load: ≤150W/loop LED		270
6	V36X	Mixpad C2 White L&N connection	Power Supply: AC100-240V, 50/60Hz L&N connection Color: White Size: 86*86*35.8cm Built-in switch: 2 gang Maximum load: ≤150W/loop LED		270
7	V32X	MixPad M2 black L&N connection	Power Supply: AC100-240V, 50/60Hz L&N connection Color: Black Size: 86*86*35.8mm Built-in switch: 4 gang Maximum load: 1/2 loop, 400W/loop; 3/4 loop, 200W/loop		300
8	V82X	Mixpad 7 Ultra brown	Power Supply: AC100-240V, 50/60Hz L&N connection Size: 237 x 111 x 11.3mm Screen size: 7 inches, 1024 x 600P Built-in switch: 4 gang Maximum load: 1/2 loop, 400W/loop; 3/4 loop, 200W/loop		800

9	V82X	Mixpad 7 Ultra green	Power Supply: AC100-240V, 50/60Hz L&N connection Size: 237 x 111 x 11.3mm Screen size: 7 inches, 1024 x 600P Built-in switch: 4 gang Maximum load: 1/2 loop, 400W/loop; 3/4 loop, 200W/loop		800
10	V82X	Mixpad 7 Ultra silver	Power Supply: AC100-240V, 50/60Hz L&N connection Size: 237 x 111 x 11.3mm Screen size: 7 inches, 1024 x 600P Built-in switch: 4 gang Maximum load: 1/2 loop, 400W/loop; 3/4 loop, 200W/loop		800
11	V80X	Mixpad 7	Power Supply: AC100-240V, 50/60Hz L&N connection Color: Black Size: 177.2 x 111.1 x 40.25mm Screen size: 7 inches, 1024 x 600P Built-in switch: 4 gang Maximum load: 400W/loop		650
12	DV10	MixSwitch Defy Smart Panel grey	Size: 92.5 x 86 x 38.9 mm Color: Grey Power supply: AC100-240V, 50/60Hz Screen size: 2.41 inches Max. Load: 1/2 loop, 400W/loop; 3 loop, 200W		240
13	DV10	MixSwitch Defy Smart Panel orange	Size: 92.5 x 86 x 38.9 mm Color: Orange Power supply: AC100-240V, 50/60Hz Screen size: 2.41 inches Max. Load: 1/2 loop, 400W/loop; 3 loop, 200W		240
14	V60X	Mixpad X	Power Supply: AC100-240V, 50/60Hz L&N connection Color: Black Size: 317 x 141 x 13mm Screen size: 12.3 inches Built-in switch: 2 gang Maximum load: 600W/loop		1200
15	V62X	Mixpad X Pro	Power Supply: AC100-240V, 50/60Hz L&N connection Color: Black Size: 317 x 141 x 13mm Screen size: 12.3 inches Built-in switch: 2 gang Maximum load: 600W/loop		1300
Bluetooth Mixpad Genie					
18	V51X	Input 5V 1A , Zigbee、BLT、WiFi Protoocal, IR940nm White,V51X w/ gear box	Bluetooth gateway with screen. Supports 3 scene buttons. Built-in 3 gang light. Integrated IR blaster feature. Power Supply:DC5V 1A Color: White Screen size: 3.27 inches Size: 86*87*11.4mm Built-in switch: 3 gang, 200W/gang		200
19	V51X	Input 5V 1A , Zigbee、BLT、WiFi Protoocal, IR940nm Grey,V51X w/ gear box	Bluetooth gateway with screen. Supports 3 scene buttons. Built-in 3 gang light. Integrated IR blaster feature. Power Supply:DC5V 1A Color: Grey Screen size: 3.27 inches Size: 86*87*11.4mm Built-in switch: 3 gang, 200W/gang		200




Air Conditioner/TV Control/IR Transfer					
20	CT10W-B1VO	WiFi Remote Control Magic Cube , 5V, 1A, 50/60Hz	Power Supply:DC5V, 1A, micro USB Size:53*53*54mm Wireless standard:Wi-Fi 2.4GHz b/g/n		28
21	CT30W	WiFi Remote Control Magic Cube , 5V, 1A, 50/60Hz	Power Supply:DC5V, 1A, micro USB Size:Φ66*42.5mm Wireless standard:Wi-Fi 2.4GHz b/g/n		20
22	VS20RB-1VO	RF hub & WiFi IR controller Allone Pro,100-240V~, 50-60Hz	Power Supply:DC5V, 1A, micro USB Size:Φ110*31mm Wireless standard:Wi-Fi 2.4GHz b/g/n		36
	TS20W5LZ	FLOOR Smart FCU type Center AC Control Panel,	Size:86*86*15mm Power Supply:AC100V-240V, 50/60Hz Working temp.: -20~40°C		95
23	TS31W5LZ	Smart FCU type Center AC Control Panel,	Size:86*86*15mm Power Supply:AC100V-240V, 50/60Hz Working temp.: -20~40°C		90
Smart Camera (Indoor & Outdoor)					
	SC40PT	Indoor WiFi PTZ CameraWhite without adaptor	Pixel: 2 million (1080P) Size: 76x72x118mm Color:White Power Supply:DC5V/1A PTZ angle: Horizontal 0°~355°/Vertical 0°~60°		70
25	SC41PT	Indoor WiFi PTZ CameraWhite without adaptor	Pixel: 3 million (2K) Size: 59×70×102mm Color:Black Power Supply:DC5V/1A PTZ angle: Horizontal 0°~350°/Vertical -20°~90°		110
26	BC10	Smart Outdoor Camera S3	Size: 146 × 65 × 65 mm Power Supply: DC 12V 1A/PoE 48V Pixel: 4MP (2560*1440) Lens: 2.8mm F1.6 Wireless network: 2.4G WIFI(IEEE802.11b/g/n/) PoE Standard: IEEE 802.3at		160
27	NVR108P	Digital Video Recorder	Size: 280 × 230 × 47mm Power input/output: Input: DC48V 1.35A / Output: PoE 48V Video resolution: Maximum 4MP Synchronous playback: 4 channels Audio Output: 1 channel Camera Channel: 8 channels Maximum capacity of single hard disk: 8TB		400
Smart Home Security					
28	CGZ05010	Detect human in the room	Power supply: AC100 - 240V 50Hz Size: φ80*φ65*H45mm Cut-out size: φ68mm Detection Angle: ≤90°		110
29	SN20	Motion Sensor(PIR)	Wireless Technology : Zigbee Working Voltage 3V (CR2032 battery) Transmission Frequency 2.4 GHz Color White Dimensions 48.4X53.4m Detection Radius 8m Communication Protocol Zigbee HA 2.4G		42

30	SM20	Door/Window Sensor	Wireless Technology : Zigbee Working Voltage 3V (CR2032 battery) Transmission Frequency 2.4 GHz Color White Dimensions:Main body: 52.6 mm x 26.5 mm x 13.8 mm Working hum. 10%-90% RH Communication Protocol Zigbee HA 2.4G		38
31	SN11	Motion Sensor(PIR)	Size:Φ52.6*63.6mm Color:White Housing Material:PC Power Supply:AA*2 battery Working temp.: -10~50°C		42
32	SM11	Door/Window Sensor	Transmit Size: 61.5*30.3*11.7mm Magnet Size: 44.8*10.9*7.9mm Color:White Housing Material:PC Power Supply:CR2032 battery Working temp.: -10~50°C		38
33	ST30	Temperature & Humidity Sensor ORVIBO	Housing Material:PC Power Supply:DC 3V (CR2450 button Battery) Working temp.: -15~60°C		40
34	SE30	Emergency Button	Housing Material:PC Power Supply:DC 3V (CR2032 button cell) Working temp.: -10~50°C		26
35	SF30	Smoke Sensor	Housing Material:PC Power Supply:DC 3V (CR123A Lithium Battery) Working temp.: -10~50°C		34
36	SG30	Combustible Gas Sensor r	Housing Material:PC Power Supply:AC 100V - 240V Working temp.: -10~50°C Adapor: EU Standard		48
37	SG30	Combustible Gas Sensor r	Housing Material:PC Power Supply:AC 100V - 240V Working temp.: -10~50°C Adapor: UK Standard		48
38	SW30	Water Leakage Sensor	Sensor Dimension: 28.3*26.5*12.2mm Housing Material:PC Power Supply:DC 3V (CR2032 button cell) Working temp.: -10~50°C		35
Smart Defy Switch					
39	D10W3	MixSwitch Defy 3 keys grey	Size: 92.5 x 86 x 35.25 mm Color: Grey Power supply: AC100-240V, 50/60Hz Max. Load: 400W/gang (Totally three loops should less than 1200W)		85
40	D10W3	MixSwitch Defy 3 keys orange	Size: 92.5 x 86 x 35.25 mm Color: Orange Power supply: AC100-240V, 50/60Hz Max. Load: 400W/gang (Totally three loops should less than 1200W)		85
41	D10W4	MixSwitch Defy 4 keys grey	Size: 92.5 x 86 x 35.25 mm Color: Grey Power supply: AC100-240V, 50/60Hz Max. Load: 400W/gang (Totally four loops should less than 1200W)		100
42	D10W4	MixSwitch Defy 4 keys orange	Size: 92.5 x 86 x 35.25 mm Color: Orange Power supply: AC100-240V, 50/60Hz Max. Load: 400W/gang (Totally four loops should less than 1200W)		100
Smart Bach Switch					

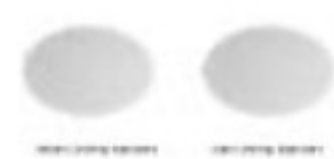

43	B10W4	MixSwitch · Bach 4 keys grey	Size: 86 x 86 x 38.3 mm Color: Grey Power supply: AC100-240V, 50/60Hz Max. Load: 800W/gang (Totally four loops should less than 1200W)		130
44	B10W4	MixSwitch · Bach 4 keys blue	Size: 86 x 86 x 38.3 mm Color: Blue Power supply: AC100-240V, 50/60Hz Max. Load: 800W/gang (Totally four loops should less than 1200W)		165
45	B10W4	MixSwitch · Bach 4 keys golden	Size: 86 x 86 x 38.3 mm Color: Golden Power supply: AC100-240V, 50/60Hz Max. Load: 800W/gang (Totally four loops should less than 1200W)		185
46	B10W8	MixSwitch · Bach 8 keys grey	Size: 86 x 86 x 38.3 mm Color: Grey Power supply: AC100-240V, 50/60Hz Max. Load: 800W/gang (Totally four loops should less than 1200W)		160
47	B10W8	MixSwitch · Bach 8 keys blue	Size: 86 x 86 x 38.3 mm Color: Blue Power supply: AC100-240V, 50/60Hz Max. Load: 800W/gang (Totally four loops should less than 1200W)		180
48	B10W8	MixSwitch · Bach 8 keys golden	Size: 86 x 86 x 38.3 mm Color: Golden Power supply: AC100-240V, 50/60Hz Max. Load: 800W/gang (Totally four loops should less than 1200W)		200
49	B10W4	MixSwitch · Bach 4 keys silver	Size: 86 x 86 x 38.9 mm Color: Silver Power supply: AC100-240V, 50/60Hz Max. Load: 800W/gang (Totally four loops should less than 1200W)		165
50	B10W8	MixSwitch · Bach 8 keys silver	Size: 86 x 86 x 38.3 mm Color: Silver Power supply: AC100-240V, 50/60Hz Max. Load: 800W/gang (Totally four loops should less than 1200W)		180
Zigbee Mixswitch Bach Accessory					
51	LPK04	MixSwitch · Bach Millimeter frame (3 gang-mixpad & switch)	Color: Black Size: 258.4*85.8* 4.3mm		30
52	LPK05	MixSwitch · Bach Millimeter frame (3 gang-switch)	Color: Black Size: 258.2*85.8* 4.3mm		30
53	LPK06	MixSwitch · Bach Millimeter frame (2 gang-mixpad & switch)	Color: Black Size: 172.2* 85.8*4.3mm		20
54	LPK07	MixSwitch · Bach Millimeter frame (2 gang-switch)	Color: Black Size: 171.8* 85.8*4.3mm		20
Smart Lighting Control					
55	T30W1Z	Zigbee ON/OFF Switch(CN type,1 Gang neutral 100-240V)touch control, Glass panel	Size:90*86*38mm Electrical Parameters:AC250V, 50/60Hz Working temp.: -20℃~60 ℃ 綑-4綑140°F Max. Load: 600W		42
55	T30W2Z	Zigbee ON/OFF Switch(CN type,2 Gang neutral 100-240V) touch control, Glass panel	Size:90*86*38mm Electrical Parameters:AC250V, 50/60Hz Working temp.: -20℃~60 ℃ 綑-4綑140°F Max. Load: 600W/gang;		45
55	T30W3Z	Zigbee ON/OFF Switch(CN type,3 Gang neutral 100-240V) touch control, Glass panel	Size:90*86*38mm Electrical Parameters:AC250V, 50/60Hz Working temp.: -20℃~60 ℃ 綑-4綑140°F Max. Load: 200W/gang		48
55	T30S3Z	Zigbee Scene Switch(CN type neutral 100-240V) touch control, Glass panel	Size:90*86*38mm Electrical Parameters:AC250V, 50/60Hz Working temp.: -20℃~60 ℃ 綑-4綑140°F		48

55	T40S6Z	MixSwitch Remote Contr	Size:86*86*10mm Battery Model:CR2032 Battery Lifetime:1 year in standand working enviornment Communication Protocol:Zigbee 1.2HA Working Temperature:-20 - 60°C Woking Humidity:≤80% RH		64
56	T40W1Z	MixSwitch- 1 Gang	Size:86*86*39mm Power:200W/loop Input Voltage:110V-250V, 50/60Hz Communication Protocol:Zigbee 3.0 Working Temperature:-20 - 60°C Woking Humidity:≤80% RH		66
57	T40W2Z	MixSwitch- 2 Gang	Size:86*86*39mm Power:200W/loop Input Voltage:110V-250V, 50/60Hz Communication Protocol:Zigbee 3.0 Working Temperature:-20 - 60°C Woking Humidity:≤80% RH		68
58	T40W3Z	MixSwitch- 3 Gang	Size:86*86*39mm Power:200W/loop Input Voltage:110V-250V, 50/60Hz Communication Protocol:Zigbee 3.0 Working Temperature:-20 - 60°C Woking Humidity:≤80% RH		70
59	T40W4Z	MixSwitch 4- gang switch, 2 gang scene switch, grey color	Size:86*86*39mm Power:200W/loop Input Voltage:110V-250V, 50/60Hz Communication Protocol:Zigbee 3.0 Working Temperature:-20 - 60°C Woking Humidity:≤80% RH		74
60	T40K1	Non-smart socket	Power supply: AC250V 50/60Hz		12
61	LPK01	1 gang mix switch frame			8
62	LPK02	2 gang mix switch frame			12
63	LPK03	3 gang mix switch frame			18
64	T40S6ZW	MixSwitch smart remote control panel	Size: 86*86*10mm Power supply: DC3V (CR2032 battery) Working Temperature: -20°C~60°C Working Humidity: ≤80%		64
65	T40W1ZW	MixSwitch 1 gang	Size: 86*86*39mm Power supply: AC250V, 50/60Hz Max. Load: 200W/gang Working Temperature: -20°C~60°C Working Humidity: ≤80%		66
66	T40W2ZW	MixSwitch 2 gang	Size: 86*86*39mm Power supply: AC250V, 50/60Hz Max. Load: 200W/gang Working Temperature: -20°C~60°C Working Humidity: ≤80%		68
67	T40W3ZW	MixSwitch 3 gang	Size: 86*86*39mm Power supply: AC250V, 50/60Hz Max. Load: 200W/gang Working Temperature: -20°C~60°C Working Humidity: ≤80%		70

68	T40W4ZW	MixSwitch 4- gang switch, 2 gang scene switch, white color	Size: 86*86*33mm Power supply: AC250V, 50Hz Max. Load: 400W/gang Working Temperature: -20°C~60°C Working Humidity: ≤80%		74
69	T40K1W	Non-smart socket	Power supply: AC250V 50/60Hz		12
70	LPK01	1 gang mix switch frame			8
71	LPK02	2 gang mix switch frame			12
72	LPK03	3 gang mix switch frame			18
73	T40S6ZG	MixSwitch smart remote control panel	Size: 86*86*10mm Power supply: DC3V (CR2032 battery) Working Temperature: -20°C~60°C Working		64
74	T40W1ZG	MixSwitch 1 gang	Size: 86*86*39mm Power supply: AC250V, 50/60Hz Max. Load: 200W/gang		66
75	T40W2ZG	MixSwitch 2 gang	Size: 86*86*39mm Power supply: AC250V, 50/60Hz Max. Load: 200W/gang		68
76	T40W3ZG	MixSwitch 3 gang	Size: 86*86*39mm Power supply: AC250V, 50/60Hz Max. Load: 200W/gang		70
77	T40W4ZG	MixSwitch 4- gang switch, 2 gang scene switch, golden color	Size: 86*86*33mm Power supply: AC250V, 50Hz Max. Load: 400W/gang		74
78	T40K1G	Non-smart socket	Power supply: AC250V 50/60Hz		12
79	LPK01	1 gang mix switch frame			8
80	LPK02	2 gang mix switch frame			12
81	LPK03	3 gang mix switch frame			18
82	AH01	Mm box special cassette	Mixswitch cassette		5
MixSwitch Normal Socket					
83	T40K2	MixSwitch Socket +1 Gang	Power supply: AC250V 50/60Hz		14
85	T40K4	MixSwitch Fast Charge Socket	Power supply: AC250V 50/60Hz AC output : 2200W USB output : DC 5V 3A or 9V 2A or 12V		32
86	T40K5	MixSwitch Computer Socket	Power supply: AC250V 50/60Hz		16
87	T40K6	MixSwitch TV Socket	Power supply: AC250V 50/60Hz		16
88	T40K7	MixSwitch Telephone Socket	DC 24V 3A		16
89	T40K8	MixSwitch Emergency Button	DC 24V 3A		16

90	T40K2G	MixSwitch Socket +1 Gang	Power supply: AC250V 50/60Hz		12
92	T40K4G	MixSwitch Fast Charge Socket	Power supply: AC250V 50/60Hz AC output : 2200W USB output : DC 5V 3A or 9V 2A or 12V		32
93	T40K5G	MixSwitch Computer Socket	Power supply: AC250V 50/60Hz		16
94	T40K6G	MixSwitch TV Socket	Power supply: AC250V 50/60Hz		16
	T40K7G	MixSwitch Telephone Socket	DC 24V 3A		16
96	T40K8G	MixSwitch Emergency Button	DC 24V 3A		15
97	T40K2W	MixSwitch Socket +1 Gang	Power supply: AC250V 50/60Hz		12
98	T40K3W	MixSwitch 16A Socket+1 Gang	Power supply: AC250V 50/60Hz		14
99	T40K4W	MixSwitch Fast Charge Socket	Power supply: AC250V 50/60Hz AC output : 2200W USB output : DC 5V 3A or 9V 2A or 12V		32
100	T40K5W	MixSwitch Computer Socket	Power supply: AC250V 50/60Hz		16
101	T40K6W	MixSwitch TV Socket	Power supply: AC250V 50/60Hz		16
102	T40K7W	MixSwitch Telephone Socket	DC 24V 3A		16
103	T40K8W	MixSwitch Emergency Button	DC 24V 3A		16
Smart In Wall Switch Module					
104	R20W2Z	Inwall switch 2 gang L- type	Power Supply:AC 110-240V 50/60Hz Body Size :46*50.5*18mm Color:Grey Working temp.: -20~60°C Working hum.: ≤80%RH Max. Load:Incandescent/Halogen lamp: 200W LED/Fluorescent lamp: 100W Communication Protocol:Zigbee HA Working Frequency:2.4G		46
105	R30W3Z	Neutral Line In Wall Switch	Power Supply:250V 50/60Hz Body Size:63*58*28mm Color:White + Silver Working temp.: -20~60°C Working hum.: ≤80%RH Max. Load:Incandescent/Halogen lamp: 400W LED/Fluorescent lamp: 200W Communication Protocol:Zigbee HA Working Frequency:2.4G		56

106	DM10ZW	Dimmer Controller	Power Supply:AC100V-240V, 50/60Hz Body Size :168*39.5*30mm Color:White + Silver Output Current:50mA max Output Channel:2 Working hum.: 20%-90% RH		78
107	DMN12182	0-10V LED Driver for 3- party down light (Work with DM10ZW)	Input: 200-240V~50HZ/60Hz Max:0.1A I _{in} :0.5 Output: 32-40V=250mA Vmax:50VDC Max. Load: 10W		35
Smart Downlight & Spotlight					
114	DD20Z-05	Zigbee Smart LED Downl	Product name: Smart Downlight Model: DD10Z Size: 2.5inch綑φ91*63mm綑hole size70-80mm Rate: 5W Input: 100-240V綑 50/60Hz Rate factor: 0.5 Luminous flux: 350lm,RA90 Color temperature range: 2700-6500K Brightness adjustment: 3%-100% Optical		US\$28.00
115	DS20Z-06	Zigbee Smart LED Spotlight	Product name: Smart Spotlight Model: DS10Z Size:2.5inch,φ85*60mm,hole size 70- 80mm Rate : 6W Input: 100-240V綑 50/60Hz Rate factor: 0.5 Luminous flux: 450lm,RA90 Color temperature range: 2700-6500K Brightness adjustment: 3%-100% Optical requirement: COB+lens,32°Luminous angle,30°Rotation angle		US\$33.00
Smart Curtain System					
116	W45CZ	Curtain motor(AC),built- in relay(ZigBee module)	Size:310*68*50mm Electrical Parameters:AC100綑240V 50/60Hz Max. Load: 40Kg (curtain with 8 m)		180
117	0.1m	1 meter rail for AC Curtain motor			18
118	AC123-02C	Remote Controller(emitter) for the motor			33
119	W50CZ	Curtain Motor	Size:250*35*35mm Electrical Parameters:DC 12.6V, 12V battery Max. Load: 40Kg (curtain with 4 m) 50 Kg		205
120	0.1m	Rail for Curtain Motor(1m)			21
121	G30	Zigbee smart tubular motor	Size:527*30mm Electrical Parameters:100綑240VAC , 50/60HZ Max. Load: 25Kg Width : 600mm ≤ the width of curtain ≤ 2500mm Height : 400mm ≤ the height of curtain ≤ 3500mm		196
122	YR3202	Remote Control for G30	Power supply: AC250V 50/60Hz		36
Smart Door Lock					
123	T1C	Smart Lock	Size: 336mm*66mm*70mm Power Supply:DC 7.5V (AA battery) Emergency power supply: DC 5V, Type C Supported door thickness: 40綑120mm (Standard:50綑90mm) Working temp.: -10綑50°C		520

124	C1	Smat Door Lock	Size: 352mm*70mm*67mmPower Supply: DC 3V (4 pcs AA battery for 300 days)Emergency power supply: DC 5V, Type CSupported door thickness: 40~120mm (Standard:50~90mm)Working temp.: -20~60°C		300
125	S2	Smart Door lock	Size: 336mm*66mm*70mm Power Supply:DC 7.5V (AA battery) Emergency power supply: DC 5V, Type C Supported door thickness: 40~120mm (Standard:50~90mm) Working temp.: -10~50°C		440
126	OLOCK	Smart Door Lock	Operating voltage:6V(4 batteries) Low voltage alarm voltage:4.4V Emergency power supply:Type_C USB 5V Networking Method:WiFi Battery life:More than 400days Unlock Record:APP view Unlock way: Password, NFC, APP,Key Unlock Support door thickness:35mm-50mm		190
Smart Relay					
127	CM10ZW	Multifuntional Relay (curtain>window>door)	Size:70*70*23mm Electrical Parameters:AC100V-240V, 50/60Hz Working temp.: -20~60°C Max. Load: 1A (per loop)		60
128	CD10ZW	Sensor Relay	Size:70*70*23mm Electrical Parameters:DC12V Working temp.: -10~45°C		60
129	CC10ZW	RGB relay	Size:70*70*23mm Electrical Parameters:DC12V/DC24V Working temp.: -20~60°C Max. Load: 20A		60
Bluetooth Speaker(Not connected to ORVIBO APP)					
225	LSP20	Bluetooth speaker	Size: φ200*105*80mm Cut-out size: 185mm Power Supply:DC19V 3A Master 1 piece Slave 1 piece		268
226	LSP21	Smart Ceiling Speaker (Slave one pair)	Size: φ200*105*80mm Cut-out size: 185mm Power Supply:DC19V 3A Slave 2pcs		210
227	ArtisBox Play G	Smart Wall Speaker Grey	Size: 520*720*48mm Power Supply: DC20V/1.5A		600
234	ArtisBox mini	ArtisBox mini orange	Size: 540×400×47mm Color: Orange Input: AC100V-240V Power Supply: DC19V 2.5A Speaker Power: 10W*3 Frequency: 50Hz-20KHz Protocol: Bluetooth 5.0 Impedance: 4Ω		500



جهت مشاوره، رایگان و ثبت سفارش
با شماره های ارتباطی
09133748208-03538414053
تماس حاصل فرمایید.

