




# Sound Systems

(Products Collection 2022)





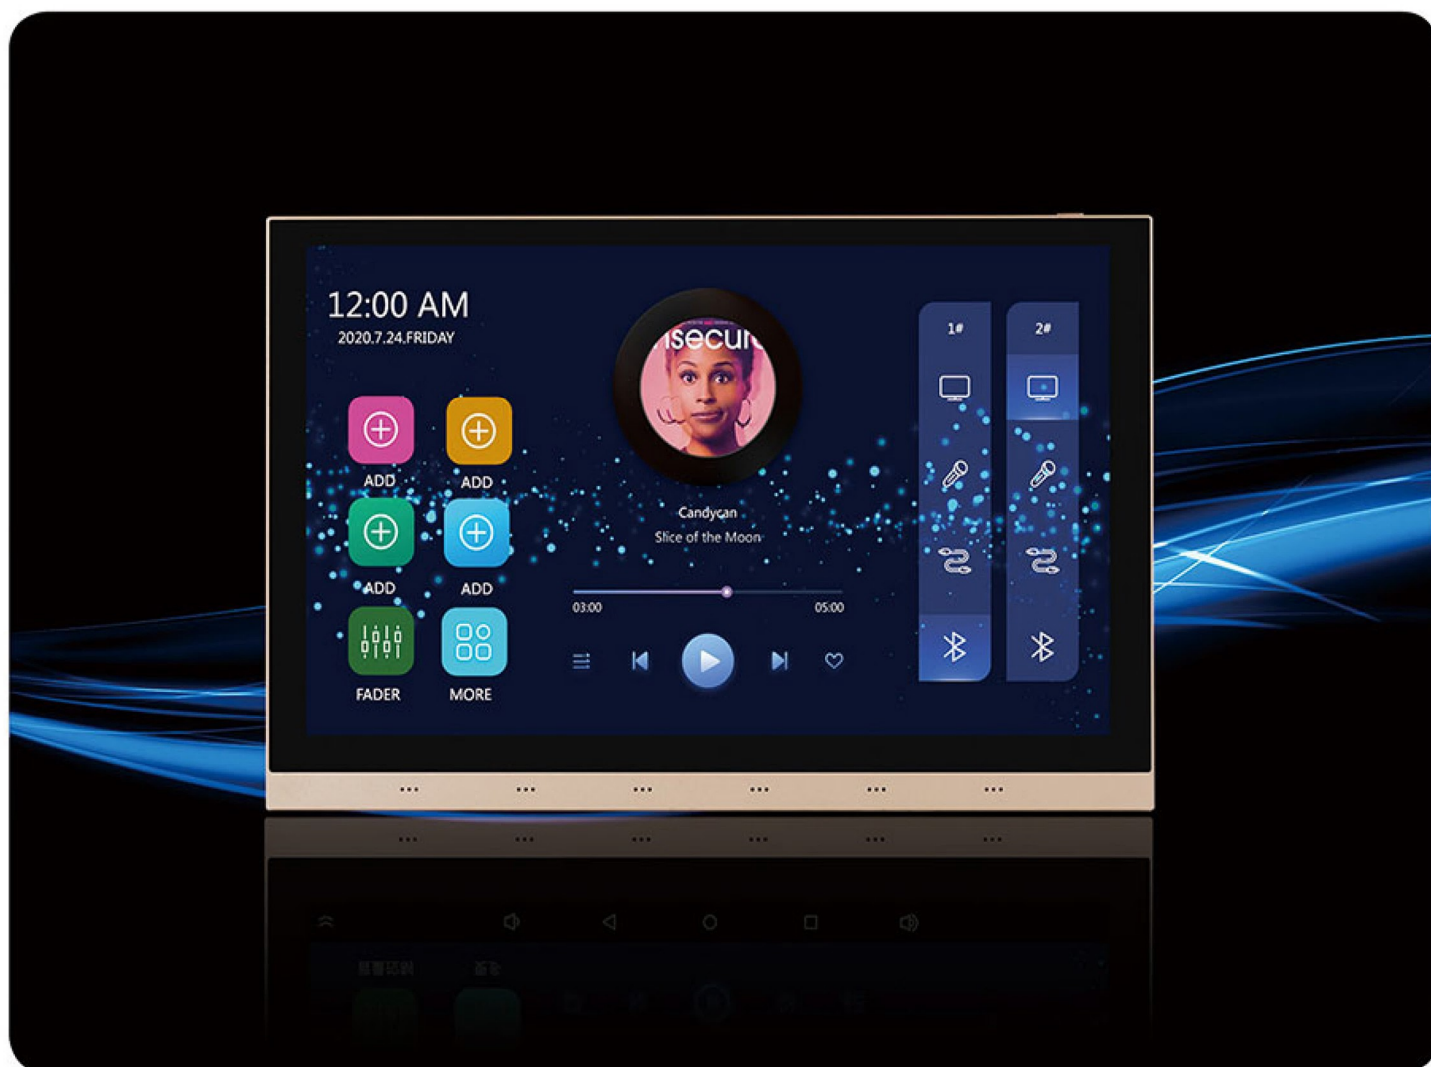

**10.1 inch IPS**

**8\*25W Output**

**Two-zone**

**APP Control**

**2+16G**

## **S.O.S-A10** Smarthome background music controller



### ◆ SPECIFICATIONS

Output	8*25W
Dimension	250*160*50mm
Cutout	180*112*70mm
Voltage	110-240V



### ◆ DISCREPTION

- 10.1 inch IPS touch screen HD screen
- Powered by Andriod operation system
- 8\*25W output
- Quad core CPU: 2G, 16G storage memory
- Two-zone independent ctrlol
- 8 stereo channels, 8 partitions
- 8 speaker terminals
- Built in wireless mic with reverberation
- Screen Mirroring/Air play/DLNA
- HDMI output
- Support TF card, USB port,485 protoco
- RJ45 Ethernet port

**7 inch IPS****Smart home****Tuya Gateway****8\*25W output****2+16G**

## **S.O.S-C10-7** Tuya Android intelligent control panel



### ◆ SPECIFICATIONS

Output	8*25W
Dimension	185*125*51mm
Cutout	172*110*60mm
Voltage	110-240V



### ◆ DISCREPTION

- Hardware: 7-inch IPS display, 1024\*600 resolution, 2+16G memory, 4-core CPU, Bluetooth support
- Output power: 8 channels 8\*25W output (Yamaha digital power amplifier)
- Smart home: Built-in Tuya gateway, all smart homes connected to Tuya can be controlled. Support 485 bidirectional control
- Input and output: support HDMI video output, support TF card, OTG USB disk, local playback, audio input and output 1 channel, bass output 1 channel
- Support trigger doorbell remote control operation
- Internet connection: WIFI
- Family karaoke (optional)
- Language: Support English, Chinese, Arabic, Polish





**7 inch IPS**

**8\*25W Output**

**Two-zone**

**APP Control**

**2+16G**

## **S.O.S-JX701** Smarthome background music controller

### ◆ SPECIFICATIONS

Output	8*25W
Dimension	192*125*49mm
Cutout	180*112*70mm
Voltage	110V-240V



### ◆ DISCREPTION

- 7 inch IPS touch screen, 1024 \* 600 resolution HD screen
- Powered by Android operation system
- 8\*25W output
- Quad core CPU: 2G, 16G storage memory
- Two-zone independent control
- 8 stereo channels, 8 partitions
- 8 speaker terminals
- Built in wireless mic with reverberation
- Screen Mirroring/Air play/DLNA
- HDMI output
- Support TF card, USB port, 485 protocol
- RJ45 Ethernet port





**Android Host**

**7 inch LCD screen**

**4 Core CPU**

**1+8G memory**

## **S.O.S-JX101** Andriod background music controller



### ◆ SPECIFICATIONS

Output	4*25W
Dimension	186*122*52mm
Cutout	172*110*70mm
Voltage	110-240V



### ◆ DISCREAPTION

- Hardware configuration: 7-inch 1024\*600 capacitive touch screen, 4-core CPU, 1G running memory + 8G storage memory, HDMI output.
- Song input: support Android DLNA, Apple Airplayer, support Bluetooth, external sound input, local TF, USB, online songs, etc.

Music format: support full format lossless format music  
 Smart home interface: support Zigbee, serial 485 smart home interface  
 Support external doorbell sound  
 Networking: support online RJ45 and WIFI networking  
 Android system: App can be installed



**Bluetooth**

**Lossless music**

**Four channel**

**Touch control**

## **S.O.S-JX400H** Bluetooth background music controller

### ◆ SPECIFICATIONS

Output	4*25W
Dimension	146*86*52mm
Cutout	136*76*65mm
Voltage	110-240V

### ◆ DISCREAPTION

- 5-inch display: ISP LCD high-definition color screen
- Power: 2\*30W high power, Texas Instruments power amplifier chip
- Music format: support lossless format music
- Aviation grade aluminum frame: aviation aluminum CNC engraving, anodizing technology
- Timing: Support three-speed timing switch



- Using bluetooth 4.1 chip: can change the bluetooth name,
  - Power-off playback memory: will memorize the songs played before power-off
  - Support TF card, USB interface, 485 serial port
  - Support bluetooth signal automatic switching function
- Four channel output





4 inch IPS

Tuya Gateway

Smart home

Android 8.1

ZIGBEE

## S.O.S-86W 4-inch Android intelligent control panel



### ◆ SPECIFICATIONS

Output	2*15W
Dimension	86*86*38mm
Cutout	78*78*50mm
Voltage	AC110-250V DC12V-24V

### ◆ DISCREPTION

- Hardware: 4-inch IPS display, 480\*480 resolution, 1+8G memory, 4-core CPU, support Bluetooth,
- Output power: 2\*15W output
- Smart home: Built-in Tuya ZIGBEE module, all smart homes connected to Tuya can be controlled. Support 485 bidirectional control
- Input and output: support TF card, U disk local playback, audio input and output 1 channel, bass output 1 channel, timing output: 1 channel
- Support lossless format playback
- Built-in sound adjuster
- Support power-off memory, multi-gear timing switch





Android Host

4 Core CPU

1+8G memory

4 inch LCD screen

## S.O.S-JX807 Andriod background music controller

### ◆ SPECIFICATIONS

Output	2*20W
Dimension	86*86*35mm
Cutout	78*78*70mm
Voltage	110V-240V

### ◆ DISCREAPTION

- Hardware configuration: 4-inch 480\*480 capacitive touch screen, 4-core CPU, 1G running memory + 8G storage memory.
- Song input: support Android DLNA, Apple Airplayer, support Bluetooth, external sound input, local TF, USB, online songs, etc.
- Music format: support full format lossless format music
- Smart home interface: support Zigbee, serial 485 smart home interface
- Support external doorbell sound
- Networking: support online RJ45 and WIFI networking
- Android system: App can be installed







**4 inch IPS**

**Bluetooth**

**Lossless music**

**TF card USB**

**4 channels**

## **S.O.S-86E** 4-inch Bluetooth background music

### ◆ SPECIFICATIONS

Output	2*25W
Dimension	86*86 *50mm
Cutout	78*78*70mm
Voltage	AC110-250V VC12V-24V

### ◆ DISCREPTION

- Display: 4-inch capacitive touch screen,
- Output power: 2\*25W//4\*20W
- Song source: support TF card, USB playback, Bluetooth push, FM radio, support lossless format playback
- Input and output: 1 channel for audio input and output, 1 channel for video output, 1 channel for timing output



- Smart home, 485 interface, linking
- Support trigger doorbell to play music,
- Support power-off memory function,
- Multi-gear timing switch
- Built-in sound adjuster
- Color: Gold Black White



**Bluetooth**

**Lossless music**

**Four channel**

**Touch control**

## **S.O.S-JX803** Bluetooth background music controller

### ◆ SPECIFICATIONS

Output	4*20W
Dimension	86*86*51mm
Cutout	78*78*70mm
Voltage	110-240V

### ◆ DISCREAPTION

- IPS 3.0 "hd display,crystal panel,
- support USB cable, SD card , 485Serial port
- bluetooth 4.1, Bluetooth name can be changed
- Panel touch control
- Cardiac output power: 4\*20W ,TDA3118 power amplifier chip



- Support lossless format music play
- Support three gear timing switch
- Power off memory playback
- It can be connected to four speakers
- Infrared remote control function
- Three color panel:white / gold / bla ck





**Bluetooth**

**Lossless music**

**Four channel**

**Remote control**

## **S.O.S-JX802** Bluetooth background music controller

### ◆ SPECIFICATIONS

Output	4*20W
Dimension	86*86*51mm
Cutout	78*78*70mm
Voltage	110-240V

### ◆ DISCREAPTION

- IPS 3.0 "hd display,crystal panel,
- support USB cable, TF card , 485Serial port
- bluetooth 4.1, Bluetooth name can be changed
- Panel button operation.
- Cardiac output power: 4\*20W ,TDA3118 power amplifier chip



- Support lossless format music play
- Support three gear timing switch
- Power off memory playback
- It can be connected to four speakers
- Infrared remote control function
- Three color panel:white / gold / bla ck



**Bluetooth**

**Lossless music**

**Four channel**

**Remote control**

## **S.O.S-JX801** Smarthome background music controller

### ◆ SPECIFICATIONS

Output	4*20W
Dimension	86*86*52mm
Cutout	78*78*70mm
Voltage	110V-240V

### ◆ DISCREPTION

- 2 inch blue backlit LCD screen,
- support USB cable, TF card , 485Serial port
- bluetooth 4.1, Bluetooth name can be changed
- Panel button operation.
- Cardiac output power: 4\*20W ,TDA3118 power amplifier chip



- Support lossless format music play
- Support three gear timing switch
- Power off memory playback
- It can be connected to four speakers
- Infrared remote control function
- Three color panel:white / gold / bla ck





**Bluetooth**

**Lossless music**

**Karaoke**

**Support Dolby 5.1**

## **S.O.S-AV880** Home Theater Amplifier

### ◆ SPECIFICATIONS

Output	5*150W (THD10%, 8 Ω load mono test) 1*200W (THD 7%, 8 Ω load mono test)
Dimension	430*325*70mm
Voltage	110V-240V

### ◆ DISCRIPTION

- Decoding: support Dolby 5.1, DTS5.1 and analog 5.1
- Channel input: 5.1 channel input interface, HDMI, optical, coaxial
- HD M I: 3 in 1 out, support 3D and 4K video,
- ARC return: TV sound is returned to the amplifier through HDMI



- Speaker output: 6 channel amplification, 1 passive subwoofer and 2 active subwoofer
- Karaoke: Digital Karaoke Features
- Support PCM lossless format playback(Dolby TRUE HD and DTS MASTER)
- Support LED digital Chinese display, intuitive operation
- Support U disk SD card input,
- Support bluetooth, connecting with the amplifier is so simple



**Bluetooth**

**Lossless music**

**Four channel**

**Voice indexing**

## **S.O.S-JX3030** Bluetooth amplify

### ◆ SPECIFICATIONS

Output	2*50W
Impedance	4-80hm
Dimension	190*83*55mm
Voltage	110V-240V

### ◆ DISCRIPTION

- 100W output, TPA 3116 amplify
- Bluetooth 4.2, FM radio
- One stereo, 2 channels, 4 speaker terminals
- Support USB port
- Support lossless format music play



- One microphone port, Anti whistling
- One AUX input, One Audio out
- Support voice prompt tone
- Support remote control
- External power supply





**Bluetooth Host**

**Lossless music**

**Four channel**

**Voice indexing**

## **S.O.S-JX600** Bluetooth amplify

### ◆ SPECIFICATIONS

Output	4*50W
Impedance	4-80hm
Dimension	250*200*90mm
Voltage	110V-240V

### ◆ DISCREAPTION

- 200W output, TPA 3116 amplify
- Four channel volume control
- Two microphone port, Anti whistling
- 2 stereo channels ,4partitions, 8 speaker terminals
- Support lossless format music play



- Support Bluetooth 4.2, FM radio
- One Audio out, Two AUX input
- Support USB port
- Support voice prompt tone
- Support High and low pitch adjustment



**Bluetooth**

**Lossless music**

**Four channel**

**Voice indexing**

## **S.O.S-JX600-6** Bluetooth amplify

### ◆ SPECIFICATIONS

Output	6*50W
Impedance	4-80hm
Dimension	340*220*90mm
Voltage	110V-240V

### ◆ DISCREPTION

- 300W output, TPA 3116 amplify
- Six channel volume control
- Two microphone port, Anti whistling
- 3 stereo channels ,6 partitions, 12 speaker terminals
- Support lossless format music play



- Support Bluetooth 4.2, FM radio
- One Audio out, Two AUX input
- Support USB port
- Support voice prompt tone
- Support High and low pitch adjustment





**Bluetooth**

**Lossless music**

**Four channel**

**Voice indexing**

## **S.O.S-JX600-8 Bluetooth amplify**

### ◆ SPECIFICATIONS

Output	8*50W
Impedance	4-80hm
Dimension	485*235*90mm
Voltage	110V-240V

### ◆ DISCREAPTION

- 400W output, TPA 3116 amplify
- Eight channel volume control
- Three microphone port, Anti whistling
- 4 stereo channels ,8partitions, 16 speaker terminals
- Support lossless format music play



- Support Bluetooth 4.2, FM radio
- One Audio out, Two AUX input
- Support USB port
- Support voice prompt tone
- Support High and low pitch adjustment



## **S.O.S-SP386H** **6.5 INCH METAL REAR COVE SPEAKER**

Impedance	8Ω
Peak power	200W
Rated power	20W~100W
sensitivity	90DB
Frequency response	60-20KHZ
Dimension	φ264x242mm
Cutout	φ225mm

With iron back cover design, 6.5" PP woofer, powerful bass. 25 Core 1" dome tweeter, clear and bright sound. Circuit two-way design, Dynamic details are distinct and layered. Self-priming grille is easy to install, suitable for conferences, home background music, public broadcasting and other places.



## **S.O.S-SP616** **6.5 INCH INCLINED SPEAKER**

Impedance	8Ω
Peak power	100W
Rated power	10-60W
sensitivity	89DB
Frequency response	45-20KHZ
Dimension	φ241x125mm
Cutout	φ205*120mm

Slope design, more accurate sound field positioning, 6.5" high-quality paper cone woofer, powerful bass, 25-core 1" metal film treble, clear and bright sound. The circuit is divided by two, and the dynamic details are clear and layered. Apply to home theater rear surround, home background music, public broadcasting and other places.



## **S.O.S-SP602** **6.5 INCH FRAMELESS CEILING SPEAKER**

Impedance	8Ω
Peak power	100W
Rated power	20W~50W
Dimension	φ240x94mm
Cutout	φ210*92mm

Beautiful appearance design, independent high and low frequency unit design, 6.5" PP woofer, clear and powerful mid-bass, 25-core 1" dome tweeter, clear and bright sound. The circuit is designed with two-division frequency, and the dynamic details are clear and layered. The self-priming mesh cover is easy to install and suitable for conferences, family background music, public broadcasting and other places.





### **S.O.S-SP385h**

#### **5.25 INCH CEILING SPEAKER WITH BACK COVER**

Impedance	8Ω
Peak power	80W
Rated power	15-30W
sensitivity	90DB
Frequency response	55Hz-20kHz
Dimension	φ207*130mm
Cutout	φ180*130mm

With back cover design, 5.25"PP woofer, powerful bass. 25-core 1" dome tweeter, clear and bright sound. The circuit is designed with two-division frequency, and the dynamic details are clear and layered. The self-priming mesh cover is easy to install and suitable for conferences, family background music, public broadcasting and other places.



### **S.O.S-SP618**

#### **6.5 INCH INCLINED SPEAKER**

Impedance	8Ω
Peak power	100W
Rated power	10-35W
sensitivity	89±2dB
Frequency response	45-20KHZ
Dimension	φ240*115mm
Cutout	φ205*103mm

6.5" woofer, clear and powerful mid-bass. 25-core 1" silk membrane treble, clear and bright sound. The circuit is designed with two-division frequency, the dynamic details are clear and layered, and the self-priming grille is easy to install. It is suitable for conferences, family background music, public broadcasting and other places.



### **S.O.S-SP8**

#### **8 INCH BRAIDED BASIN CEILING SPEAKER**

Impedance	8Ω
Peak power	100W
Rated power	10-50W
Dimension	φ273*110mm
Cutout	φ245*106mm

8" woven woofer can effectively improve the depth of the bass. The 25-core 1" silk membrane tweeter has a clear and bright sound. The circuit is designed with two frequency division, and the details are clear and layered. It is suitable for conferences, cinema rear surround, background music, public broadcasting and other places.



## **S.O.S-SP502**

### **5.25 INCH FRAMELESS CEILING SPEAKER**

Impedance	8Ω
Peak power	80W
Rated power	10-30W
Dimension	φ202*89mm
Cutout	φ168*84mm

5.25" PP woofer, high woven elastic waves, make the mid-bass more powerful and clear, and 25-core 1" dome tweeter, the sound is clear and bright. The circuit is designed with two-division frequency, and the dynamic details are clear and layered. The self-priming mesh cover is easy to install and suitable for conferences, family background music, public broadcasting and other places.



## **S.O.S-SP41**

### **4 INCH FRAMELESS CEILING SPEAKER**

Impedance	8Ω
Peak power	35W
Rated power	10-20W
Dimension	φ175*80mm
Cutout	φ150*75mm

4" woven basin mid-woofer can effectively improve the depth of the bass. 25 core 1 inch dome tweeter, the sound is clear and bright. The circuit is designed with two-way frequency division, and the dynamic details are clear and layered. Suitable for conferences, home theater rear surround, home background music, public broadcasting and other places.



## **S.O.S-SP0204**

### **4 INCH WALL MOUNTED SPEAKER**

Impedance	8Ω
Peak power	40W
Rated power	3-20W
Frequency response	90Hz-20KHz
Dimension	L190*138*110mm

The 4" PP basin mid-woofer unit can effectively improve the depth of bass diving. Mylar high-pitched, clear voice. Capacitor two-way design, full of layering. Suitable for conferences, home theater rear surround, home background music, public broadcasting and other places.





## **S.O.S-SPG62**

### **6.5 INCH WATERPROOF WALL MOUNT SPEAKER**

Impedance	8Ω
Peak power	160W
Rated power	10-80W
Frequency response	55Hz-20kHz
Dimension	L285*216*205mm

6.25" PP basin mid-bass unit, high-performance elastic wave, make the mid-bass more powerful and thorough, silk-dome high-pitched, clear and bright sound, independent high and low frequency unit, using two-way design, dynamic details are clear and layered. Waterproof design, with certain waterproof ability, suitable for conferences, home background music, public broadcasting and other places.



## **S.O.S-SPG52**

### **5.25 INCH WATERPROOF WALL MOUNT SPEAKER**

Impedance	8Ω
Peak power	100W
Rated power	10-60W
Frequency response	55Hz-20kHz
Dimension	L255*186*180mm

5.25" PP basin mid-bass unit, high-performance elastic waves, make the mid-bass more powerful and thorough, silk-membrane dome treble, clear and bright sound, independent high-bass unit, two-way design, dynamic details are clear and layered. Waterproof design, with certain waterproof ability, suitable for conferences, home background music, public broadcasting and other places.



## **S.O.S-SPG51**

### **5.25" WALL MOUNTED SPEAKER**

Impedance	8Ω
Peak power	60W
Rated power	10-30W
Frequency response	55Hz-20kHz
Dimension	L183*H270*D160mm

5.25" PP basin mid-bass unit, high-performance elastic waves, make the mid-bass more powerful and thorough, Mylar high-pitched, bright sound, independent high-bass unit, using two-way design, the sound is full of layers. Suitable for conferences, home background music, public broadcasting and other places.



## **S.O.S-SP605**

### **6.5 INCH NARROW SIDE EMBEDDED SPEAKER**

Impedance	8Ω
Peak power	100W
Rated power	10W~60W
Dimension	287*203*85mm
Cutout	264*180*85mm

Two-way design HIFI design, the dynamic details of the layer are more distinct, and the playback sound of the scene is well represented. Hidden ceiling installation or wall-mounted installation saves space and is beautiful. Speaker configuration 6.5" low frequency speaker, 1" neodymium magnetic dome speaker



## **S.O.S-SP552**

### **DUAL 5.25-INCH NARROW-SIDE EMBEDDED SPEAKERS**

Impedance	8Ω
Peak power	100W
Rated power	10-80W
Dimension	389*181*75mm
Cutout	365*157*75mm

The dual 5.25" two-way design can increase the strength of each dialogue and make it more penetrating. Hidden ceiling installation or wall-mounted installation saves space and is beautiful. Suitable for home background music, also easy to use in the center of home theater, speaker configuration: 6.5" low frequency speaker, 1" neodymium magnetic dome tweeter



## **S.O.S-D8**

### **8 INCH ACTIVE SUBWOOFER**

Impedance	6Ω
Peak power	300W
Rated power	120W
Dimension	350*280*320mm
enter	lotus port
Voltage	90-240V 50Hz
weight	10KG





## S.O.S-SPD52

### 5.25 INCH LOB HORN

Impedance	8Ω
Peak power	60W
Rated power	10-30W
Frequency response	55Hz-20kHz
Dimension	180*655mm
Standard length	400mm

5.25" PP basin mid-bass unit, high-performance elastic wave, make the mid-bass more powerful and thorough, silk-dome high-pitched, clear and bright sound, independent high and low frequency unit, using two-way design, dynamic details are clear and layered. Waterproof design, with certain waterproof ability, suitable for conferences, home background music, public broadcasting and other places.



### Constant resistance volume control panel

Impedance	2—16Ω
Peak power	100W
gear	5Th gear
shape	two-channel stereo
Dimension	86*86*40mm



### Constant resistance volume control panel

Impedance	2—16Ω
Peak power	50W
gear	5Th gear
shape	two-channel stereo
Dimension	86*86*40mm



### Constant resistance volume control panel

Impedance	2—16Ω
Peak power	100W
gear	8Th gear
shape	Mono, dual channel optional
Dimension	86*86*40mm



## **S.O.S-BT21**

### Bluetooth Amplifier Board

Impedance	4-8Ω
Input Voltage	12-24V DC
Output Power	2*50W
SubPassive Output	100W
Dimensions	118*100*22mm
AUX Input	
With Volume, Base & Tribal Keys	



## **S.O.S-BTX25**

### Bluetooth Amplifier Board

Impedance	4-8Ω
Input Voltage	12-24V DC
Output Power	2*50W
Dimensions	78*68*36mm
AUX Input	
USB Input	
With Volume Keys	



## **S.O.S-BT40/BT40R**

### Bluetooth Amplifier Board

Impedance	4-8Ω
Input Voltage	12-24V DC
Output Power	2*20W
Dimensions	55*38*18mm
AUX Input	
With Volume, Play & Pause Keys	
IR Remote (for BT40R)	






## S.O.S-BT1002

### Bluetooth Amplifier Board

Impedance	4-8Ω
Input Voltage	12-24V DC
Output Power	2*100W
Dimensions	102*52*22mm
AUX Input	
With Volume Key	

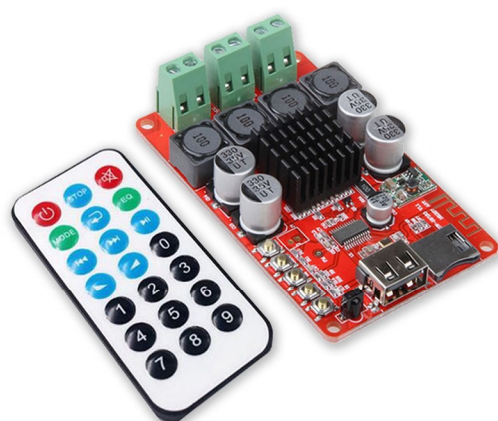

## S.O.S-BT3116

### Bluetooth Amplifier Board

Impedance	4-8Ω
Input Voltage	12-24V DC
Output Power	2*50W
Dimensions	85*52*16mm
USB & SDCard Input	
With Volume & Track Control Key	
IR Remote	



## S.O.S-BT502

### Bluetooth Amplifier Board

Impedance	4-8Ω
Input Voltage	12-24V DC
Output Power	2*50W
Dimensions	99*50*18mm
AUX Input	
With Volume Key	



## **S.O.S-BT502H**

### Bluetooth Amplifier Board

Impedance	4-8Ω
Input Voltage	12-24V DC
Output Power	2*50W
Dimensions	60*60*30mm
Original Chipset	
AUX Input/Output	
USB Input	
With Volume Key	



## **S.O.S-BT502M**

### Bluetooth Amplifier Board

Impedance	4-8Ω
Input Voltage	12-24V DC
Output Power	2*50W
Dimensions	60*60*30mm
Normal Chipset	
AUX Input/Output	
USB Input	
With Volume Key	




## **S.O.S-BT502T**

### Bluetooth Amplifier Board

Impedance	4-8Ω
Input Voltage	12-24V DC
Output Power	2*50W
Dimensions	106*70*22mm
AUX Input	
With Volume, Base & Tribal Keys	



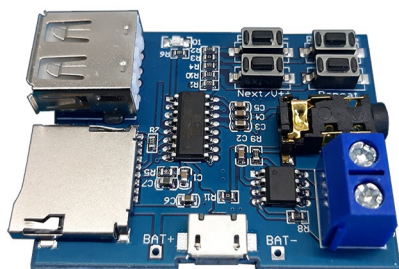

## **S.O.S-MP3Decoder**

### MP3 Decoder Board

Output Power	1*10W
Dimintions	48*35*15mm
Input Voltage	5V DC
Speaker Output	
AUX Output	
USB & SDCard Input	
With MiniUSB Port	
With Volume Keys	



## **S.O.S-Optical2AV**

### Audio Converter Optical to AV

Dimintions	61*57*27mm
------------	------------



## **S.O.S-Bluetooth2AV AUX**

### Audio Converter Bluetooth to AV & AUX

Dimintions	61*57*27mm
Input Voltage	5V DC
Bluetooth Input	
AUX Output	
AV Output	
With MiniUSB Port	



## **S.O.S-Bluetooth2AUX**

### Audio Converter Bluetooth to AUX


Dimintions	20*10*7mm
Bluetooth Input	
AUX Output	
Input Voltage from USB Port or Mobile Charger	



## **S.O.S-SpeakerCabel**

Speaker Cabel

2\*2.5mm Vire


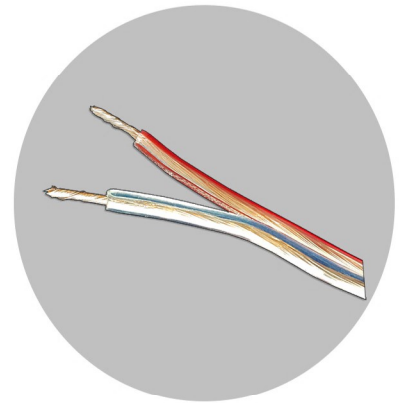


## **S.O.S-AUXCabel**

AUX Cabel

2 Core 1 Shield


2C\*28 AWG Vire

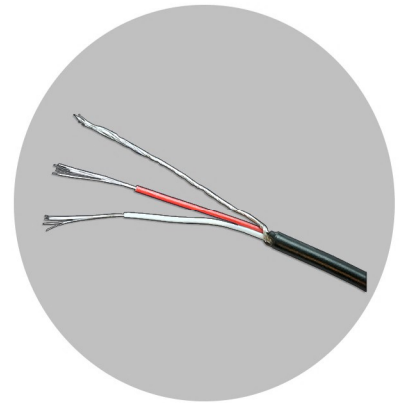

## **S.O.S-AVCabel**

AV Cabel

2 Core 2 Shield

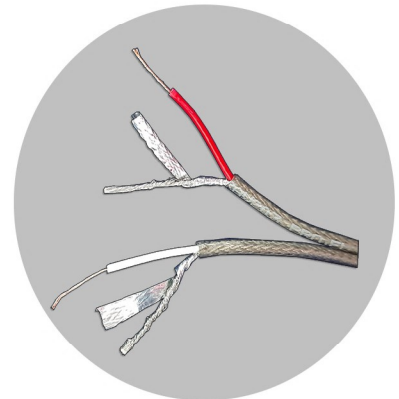

## **S.O.S-AVCabel2Plug**

Audio/Video High Grade Cabel

2 Plug AV Cabel







### **S.O.S-Adapter24v3a**

Replacement AC Adapter

Input Voltage	220V AC
Output Voltage	24V DC
Max Output Current	3A
Dimension	115*50*30mm



### **S.O.S-Adapter24v5a**

Replacement AC Adapter

Input Voltage	220V AC
Output Voltage	24V DC
Max Output Current	5A
Dimension	115*60*40mm



### **S.O.S-Adapter12v5a**

Replacement AC Adapter

Input Voltage	220V AC
Output Voltage	12V DC
Max Output Current	5A
Dimension	115*60*30mm



### **S.O.S-MobileCharger**

Mobile Charger + Cabel



S.S  
Sound  
Systems

